

HPS[™] Spherical Roller Bearings

HPS, redefining the standard.

Trademark registration
pending



HPS, redef

Life
2 times
the operating life
(maximum)

**De
Tech**
Exclusiv
through
analytica

Material Technology

State-of-the-art material
technology through
detailed analysis of raw
material

Continually developing products with
NSK's new HPS fully incorporate the advan
and manufacturing technology

A close-up, artistic photograph of several HPS spherical roller bearings. The bearings are arranged in a circular pattern, showing the outer rings and the spherical rollers. The lighting is dramatic, with strong highlights and deep shadows, creating a sense of depth and texture. The overall color palette is dominated by various shades of blue, from deep navy to bright cyan. The text "Features of HPS Spherical Roller Bearings" is overlaid in the center in a bold, white font with a red outline. The NSK logo is visible in the bottom left corner.

Features of HPS Spherical Roller Bearings

Comparison

Life
2 times
the operating life
(maximum)


Limiting Speed
20%
higher
(maximum)

Innovative design drawing upon a variety of technologies leads to high performance in next-generation products

Technology

Innovative design developed through enhanced structural analysis

The HPS cage incorporates a roller guide function in place of a guide ring. Eliminating the guide ring and optimizing the design of the inner and outer ring configuration facilitates the placement of additional, larger rollers. Optimized design for the internal specifications and improved press technology greatly increase load capacity, and realize longer life. Special surface treatment further strengthens the cage, reducing wear, heat and friction; it also allows for higher limiting speeds.

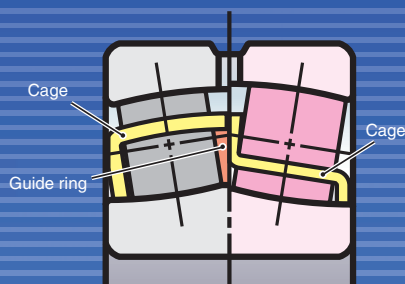


NSK old type bearing

HPS

Bearing Interior Design Comparison

Elimination of the guide ring allowed for a design change that improves cage balance and strength.

HPS Spherical Roller Bearing Table

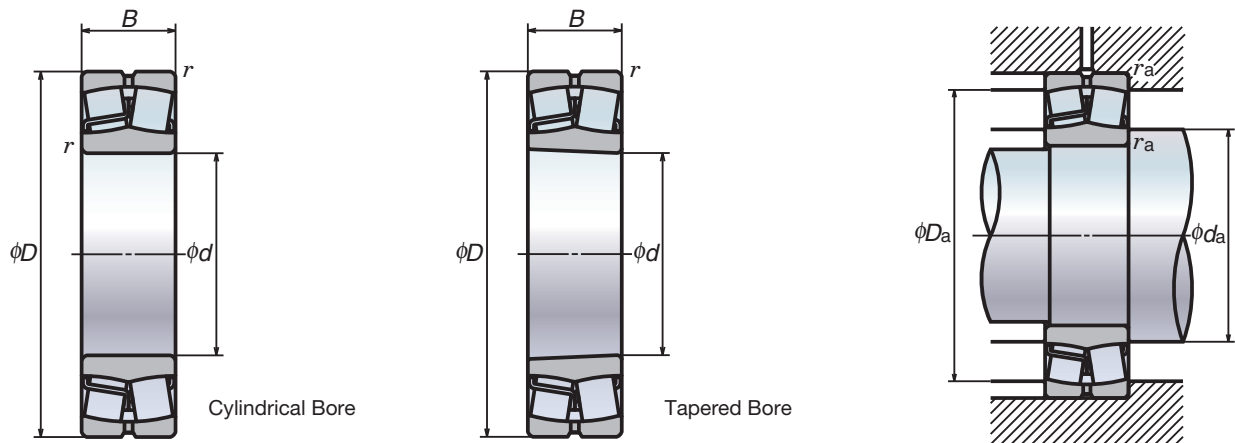

Dimensions (mm)				Basic Load Rating		Limiting Speeds (min ⁻¹)		Bearing Numbers	
d	D	B	r (min)	C_r	C_{or}	Grease	Oil	Cylindrical Bore	Tapered Bore (1)
40	80	23	1.1	113 000	99 500	6 700	8 500	22208EAE4	22208EAKE4
	90	23	1.5	118 000	111 000	6 000	7 500	21308EAE4	21308EAKE4
45	90	33	1.5	170 000	153 000	5 300	6 700	22308EAE4	22308EAKE4
	85	23	1.1	118 000	111 000	6 000	7 500	22209EAE4	22209EAKE4
50	100	25	1.5	149 000	144 000	5 000	6 300	21309EAE4	21309EAKE4
	100	36	1.5	207 000	195 000	4 500	5 600	22309EAE4	22309EAKE4
55	90	23	1.1	124 000	119 000	5 600	7 100	22210EAE4	22210EAKE4
	110	27	2	178 000	174 000	4 500	5 600	21310EAE4	21310EAKE4
	110	40	2	246 000	234 000	4 300	5 300	22310EAE4	22310EAKE4
60	100	25	1.5	149 000	144 000	5 300	6 700	22211EAE4	22211EAKE4
	120	29	2	178 000	174 000	4 500	5 600	21311EAE4	21311EAKE4
	120	43	2	292 000	292 000	3 800	4 800	22311EAE4	22311EAKE4
65	110	28	1.5	178 000	174 000	4 800	6 000	22212EAE4	22212EAKE4
	130	31	2.1	238 000	244 000	3 800	4 800	21312EAE4	21312EAKE4
	130	46	2.1	340 000	340 000	3 600	4 500	22312EAE4	22312EAKE4
70	120	31	1.5	221 000	230 000	4 300	5 300	22213EAE4	22213EAKE4
	140	33	2.1	264 000	275 000	3 600	4 500	21313EAE4	21313EAKE4
	140	48	2.1	375 000	380 000	3 200	4 000	22313EAE4	22313EAKE4
75	125	31	1.5	225 000	232 000	4 000	5 300	22214EAE4	22214EAKE4
	150	35	2.1	310 000	325 000	3 200	4 000	21314EAE4	21314EAKE4
	150	51	2.1	425 000	435 000	3 000	3 800	22314EAE4	22314EAKE4
80	130	31	1.5	238 000	244 000	4 000	5 000	22215EAE4	22215EAKE4
	160	37	2.1	310 000	325 000	3 200	4 000	21315EAE4	21315EAKE4
	160	55	2.1	485 000	505 000	2 800	3 600	22315EAE4	22315EAKE4
85	140	33	2	264 000	275 000	3 600	4 500	22216EAE4	22216EAKE4
	170	39	2.1	355 000	375 000	3 000	3 800	21316EAE4	21316EAKE4
	170	58	2.1	540 000	565 000	2 600	3 400	22316EAE4	22316EAKE4
90	150	36	2	310 000	325 000	3 400	4 300	22217EAE4	22217EAKE4
	180	41	3	360 000	395 000	3 000	4 000	21317EAE4	21317EAKE4
	180	60	3	600 000	630 000	2 400	3 200	22317EAE4	22317EAKE4
95	160	40	2	360 000	395 000	3 200	4 000	22218EAE4	22218EAKE4
	190	43	3	415 000	450 000	2 800	3 600	21318EAE4	21318EAKE4
	190	64	3	665 000	705 000	2 400	3 000	22318EAE4	22318EAKE4
100	170	43	2.1	415 000	450 000	3 000	3 800	22219EAE4	22219EAKE4
	200	67	3	735 000	780 000	2 200	2 800	22319EAE4	22319EAKE4
110	180	46	2.1	455 000	490 000	2 800	3 600	22220EAE4	22220EAKE4
	215	73	3	860 000	930 000	2 000	2 600	22320EAE4	22320EAKE4
120	200	53	2.1	605 000	645 000	2 600	3 200	22222EAE4	22222EAKE4
	240	80	3	1 030 000	1 120 000	1 900	2 400	22322EAE4	22322EAKE4
130	215	58	2.1	685 000	765 000	2 400	3 000	22224EAE4	22224EAKE4
	260	86	3	1 190 000	1 320 000	1 700	2 200	22324EAE4	22324EAKE4
	230	64	3	820 000	940 000	2 200	2 600	22226EAE4	22226EAKE4

Note (1) The suffix K indicates that the bearing has a tapered bore (taper 1:12).

Remarks 1. The maximum operating temperature of standard HPS spherical roller bearings is 200°C

2. The suffix E4 indicates that the bearing has an oil groove and holes.

(The numbers and dimensions of oil grooves and holes are shown in Tables 1 and 2.)