

Hand Tools for Steel Strapping




Manual tensioning
and sealing



Pneumatic tensioning
and sealing

The Strapex Advantage: Hand Tools, Strap and After-Sales Service as a total package

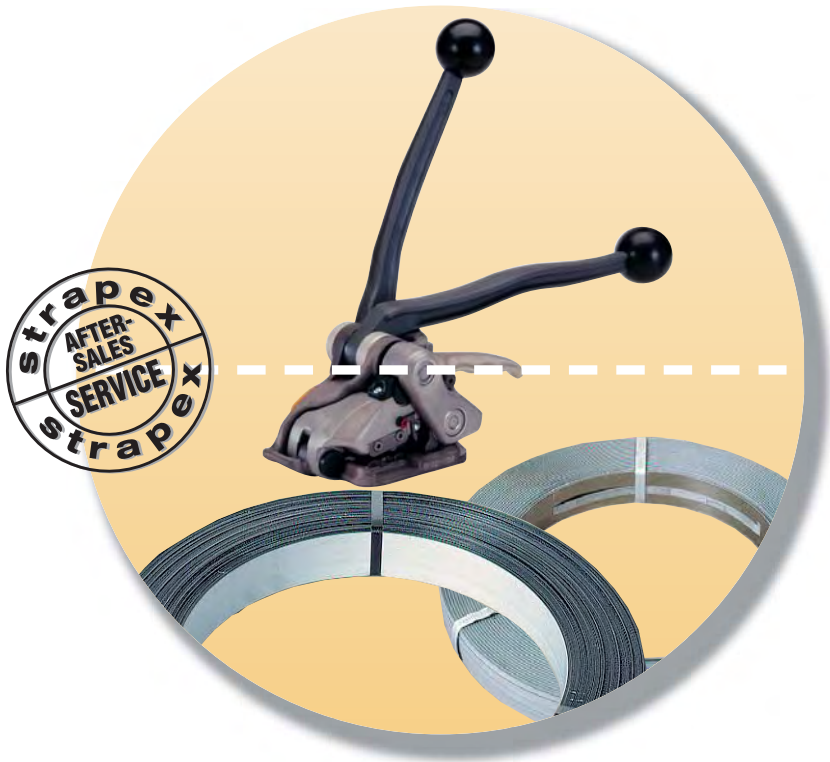

The right tool

The applications for manual strapping are varied – just like the Strapex range. You can choose one of several systems: manual or pneumatic tensing and sealing, sealless or with seal.

The right strap

A comprehensive range of steel straps each with their own characteristics to ensure that strap and tool are always the best possible combination.

Worldwide Sales and Service

You will receive expert advice on choosing the right solution and service package together with the guaranteed availability of spare parts.

Additional Products for the Transport Securing Sector

Hand tools and machines
for plastic strapping

Pallet stretch-wrapping
machines



Accessories to hand tools: Strap dispensers and strap cutters



Model STA 76 for oscillating wound steel strap
The mobile dispenser
Trolley type

With stable steel tube frame, large rubber wheels, coil brake and tray for tools, seals and strap cutters



Dispenser for steel strap

Model	Article number	Strap width	Inside Ø	Outside Ø
STA 76	461.119.001	10–19 mm ($\frac{3}{8}$ – $\frac{3}{4}$ ")	405 mm (16")	600 mm ($23\frac{5}{8}$ ")
STA 77	461.219.001	10–19 mm ($\frac{3}{8}$ – $\frac{3}{4}$ ")	405 mm (16")	600 mm ($23\frac{5}{8}$ ")



Model STA 77 The stationary dispenser for oscillating wound steel strap
Horizontal position

Model STA 78




Model STA 79



Strap cutters

Model	Article number	Strap width	Lever length
STA 78	461.019.001	10–19 mm ($\frac{3}{8}$ – $\frac{3}{4}$ ")	160 mm ($6\frac{3}{8}$ ")
STA 79	461.031.001	19–32 mm ($\frac{3}{4}$ – $1\frac{1}{4}$ ")	355 mm (14")

For flat packages: Manual, sealless tools for mobile applications

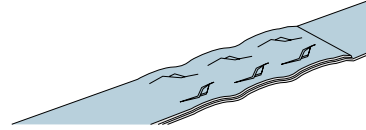

Model STM 60

The economical manual solution:
Easy, lightweight, fast

Weight only 3,5 kg (7.7 lbs)

Fast and easy strap inserting

Effortless tensioning and sealing

Ergonomic design

Flexible use: Medium to heavy packages of varying types and sizes

Maintenance-friendly:
Few wear parts – easily maintained at site



Model STM 61

For heavy duty applications


For steel straps 19 mm ($\frac{3}{4}$ " wide and up to 0.80 mm (.031") thick



Technical data		STM 60	STM 61
Article number, with steel strap			
13 x 0.63 (0.58*) mm, ($\frac{1}{2}$ x .025 (.023*)"		460.513.001	
16 x 0.63 (0.58*) mm, ($\frac{5}{8}$ x .025 (.023*)"		460.516.001	
19 x 0.63 (0.58*) mm, ($\frac{3}{4}$ x .025 (.023*)"		460.519.001	
19 x 0.80 (0.80*) mm, ($\frac{3}{4}$ x .031 (.031*)"			460.519.011
Weight		3.5 kg (7.7 lbs)	5.1 kg (11.2 lbs)
Dimensions			
	Length	370 mm (14.50")	450 mm (17.68")
	Width	185 mm (7.27")	130 mm (5.11")
	Height	122 mm (4.79")	135 mm (5.30")
Tensioning force, up to approx.		6500 N	6000 N
Steel strap			
Quality	850 N/mm ² , up to	19 x 0.63 mm ($\frac{3}{4}$ x .025")	19 x 0.80 mm ($\frac{3}{4}$ x .031")
	1100 N/mm ² , up to	19 x 0.58 mm ($\frac{3}{4}$ x .023")	19 x 0.80 mm ($\frac{3}{4}$ x .031")

* High tensile quality, up to 1100 N/mm²

For flat packages: Pneumatic, sealless tools for stationary applications

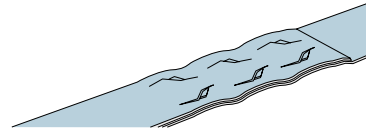


Model STP 62

Ideal for industrial applications with steel strap 13–16 mm ($\frac{1}{2}$ – $\frac{5}{8}$ " wide)

Control buttons positioned conveniently above the handle

Tensioning force up to 4000 N

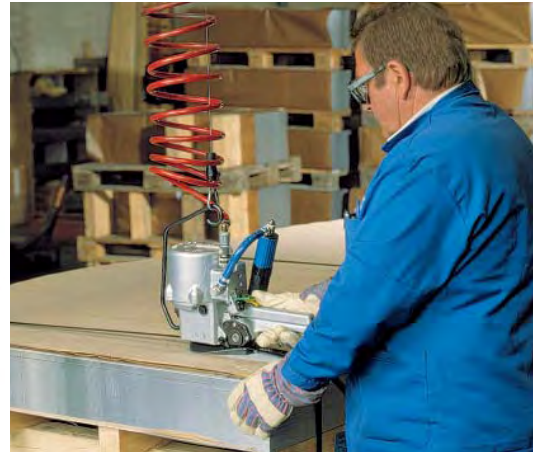

Model STP 63

Compact and light for its performance class "steel strap 16–19 mm ($\frac{5}{8}$ – $\frac{3}{4}$ " wide"

Control buttons positioned conveniently above the handle

With swivelling suspension bow


For heavy duty applications

Tensioning force up to 6500 N



Technical data		STP 62	STP 63
Article number, with steel strap			
13 x 0.60 (0.50*) mm, $\frac{1}{2}$ x .023 (.020*)"		465.513.001	
16 x 0.60 (0.50*) mm, $\frac{5}{8}$ x .023 (.020*)"		465.516.001	
16 x 0.80 (0.63*) mm, $\frac{5}{8}$ x .031 (.025*)"			465.516.011
19 x 0.80 (0.63*) mm, $\frac{3}{4}$ x .031 (.025*)"			465.519.001
Weight		9.7 kg (20 lbs)	11.5 kg (24 lbs)
Dimensions	Length	310 mm (12.18")	400 mm (15.72")
	Width	105 mm (4.12")	120 mm (4.71")
	Height	240 mm (9.43")	310 mm (12.18")
Tensioning force, up to approx.		4000 N	6500 N
Compressed air consumption (6 bar)			
– Tensioning		6 NI/s	6.4 NI/s
– Sealing		6 NI	12 NI
Steel strap			
Quality	850 N/mm ² , up to	16 x 0.60 mm ($\frac{5}{8}$ x .023")	19 x 0.80 mm ($\frac{3}{4}$ x .031")
	1100 N/mm ² , up to	16 x 0.50 mm ($\frac{5}{8}$ x .020")	19 x 0.63 mm ($\frac{3}{4}$ x .025")

* High tensile quality, up to 1100 N/mm²

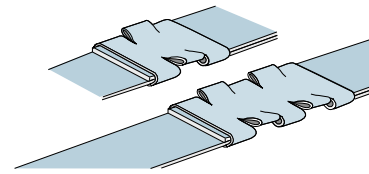

For round and small packages: Pneumatic tools for stationary/mobile applications



Model STR 64

The lightweight tool for mobile, stationary applications

Weight only 3.2 kg (7 lbs)

Tensioning force up to 3000 N

With air connection
– on top: for strapping applications with suspended hook or
– at rear: for strapping applications without suspension hook



Model STR 65

The handy tool for heavy duty, stationary applications

Tensioning force up to 7000 N

Model STR 66

The high performance tool for heavy duty, stationary applications

Tensioning force up to 8400 N



Technical data		STR 64	STR 65	STR 66
Article number, with steel strap				
13 x 0.63 (0.63*) mm, 1/2 x .025 (.025*)"		466.013.001**		
		466.013.011***		
16 x 0.63 (0.63*) mm, 5/8 x .025 (.025*)"		466.016.001**		
		466.016.011***		
19 x 0.63 (0.63*) mm, 3/4 x .025 (.025*)"		466.019.001**		
		466.019.011***		
19 x 0.80 (0.80*) mm, 3/4 x .031 (.031*)"			466.019.201	
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"				466.025.201
32 x 0.80 (0.80*) mm, 1 1/4 x .031 (.031*)"				466.032.201
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"				466.032.211
Weight		3.2 kg (7 lbs)	7.6 kg (16.6 lbs)	9.3 kg (20.4 lbs)
Dimensions	Length	302 mm (11.87")	420 mm (16.50")	470 mm (18.47")
	Width	130 mm (5.11")	160 mm (6.29")	170 mm (6.68")
	Height	180 mm (7.07")	300 mm (11.79")	300 mm (11.79")
Tensioning, up to approx.		3000 N	7000 N	8400 N
Seal notches (reverse)		1	2	2
Compressed air consumption (6 bar)				
– Tensioning		4 NI/s	6.4 NI/s	6.4 NI/s
– Sealing		3.4 NI	12 NI	14 NI

Steel strap

Quality	850 N/mm ² , up to	19 x 0.63 mm	19 x 0.80 mm	32 x 1.00 mm
	(3/4 x .025")	(3/4 x .031")	(1 1/4 x .040")	1100
N/mm ² , up to		19 x 0.63 mm	19 x 0.80 mm	32 x 0.80 mm
		(3/4 x .025")	(3/4 x .031")	(1 1/4 x .031")


Matching seals

Article number, with steel strap				
13 x 0.63 (0.63*) mm, 1/2 x .025 (.025*)"		480.013.022		
16 x 0.63 (0.63*) mm, 5/8 x .025 (.025*)"		480.016.022		
19 x 0.63 (0.63*) mm, 3/4 x .025 (.025*)"		480.019.022		
19 x 0.80 (0.80*) mm, 3/4 x .031 (.031*)"		480.019.045		
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"				480.025.045
32 x 0.80 (0.80*) mm, 1 1/4 x .031 (.031*)"				480.032.045
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"				480.032.045


* High tensile quality, up to 1100 N/mm²

** Air connection on top

*** Air connection at rear



For round and small packages: Pneumatic tools for mobile applications

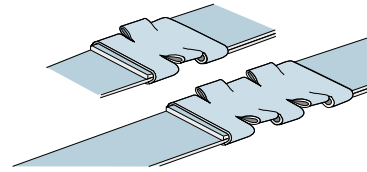

Tensioner/Sealer combination

The lightweight tools for heavy duty, mobile applications

For steel strap up to 32 mm (1 1/4") wide and up to 1 mm (.040") thick

Tensioning force up to 8400 N



Tensioner STR 67



Sealer STR 68

For single reverse notch



Sealer STR 69

For double reverse notch



Technical data	STR 67	STR 68	STR 69
Article number, with steel strap			
19–32 x 1.00 (1.00*) mm, 3/4–1 1/4 x .040 (.040*)"	466.032.501		
19 x 1.00 (0.80*) mm, 3/4 x .040 (.031*)"		466.119.601	466.219.601
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"		466.125.601	466.225.601
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"	466.132.601	466.232.601	


Weight	4.1 kg (9 lbs)	2.8 kg (6.1 lbs)	4.7 kg (10.2 lbs)
Dimensions			
Length	340 mm (13.36")	300 mm (11.79")	350 mm (13.75")
Width	110 mm (4.32")	130 mm (5.11")	170 mm (6.68")
Height	110 mm (4.32")	210 mm (8.25")	230 mm (9.04")

Tensioning, up to approx.	8400 N		
Seal notches (reverse)		1	2
Compressed air consumption (6 bar)			
– Tensioning	6.4 NI/s		
– Sealing		3 NI	6.4 NI

Steel strap				
Quality	850 N/mm ² , up to	32 x 1.00 mm	32 x 1.00 mm	32 x 1.00 mm
		(1 1/4 x .040")	(1 1/4 x .040")	(1 1/4 x .040")
	1100 N/mm ² , up to	32 x 1.00 mm	32 x 0.80 mm	32 x 0.80 mm
		(1 1/4 x .040")	(1 1/4 x .031")	(1 1/4 x .031")

Matching seals			
Article number, with steel strap			
19 x 1.00 (0.80*) mm, 3/4 x .040 (.031*)"		480.019.045/.022	480.019.045
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"		480.025.045/.022	480.025.045
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"	480.032.045/.022	480.032.045	

* High tensile quality, up to 1100 N/mm²



Strapex worldwide



Own strap manufacturing plants

Own sales and service organisations in 12 countries

Own production units in 6 countries

Independent sales partners in 42 countries

Switzerland

Strapex GmbH
Nordstrasse 1
CH-5610 Wohlen
Phone +41 56 619 81 11
Fax +41 56 619 81 00
Phone +41 56 619 80 80
(Sales Switzerland)
Fax +41 56 619 81 03
(Sales Switzerland)

U.K.

Strapex U.K.
Holdford Road, Witton
GB-Birmingham B6 7EP
Phone +44 121 356 62 64
Fax +44 121 356 78 26

Germany

Strapex GmbH
Postfach 1103
Maybachstrasse 1
D-71088 Holzgerlingen
Phone +49 7031 68 04 0
Fax +49 7031 68 04 50

Belgium

Strapex Sprl
Rue de la Science 1
B-1400 Nivelles
Phone +32 67 22 00 42
Fax +32 67 22 04 34

Denmark

ApS Strapex
Literbuen 9
DK-2740 Skovlunde
Phone +45 44 85 06 00
Fax +45 44 84 94 22

France

Strapex S.A.S.
31, Rue J.-J. Rousseau
F-94204 Ivry-sur-Seine
Phone +33 1 49 87 01 60
Fax +33 1 46 72 40 71

Italy

Strapex S.r.l.
Via delle due Porte 1
I-20087 Robecco s/Naviglio
Phone +39 02 946 98 21
Fax +39 02 947 16 10

Holland

Strapex Nederland B.V.
Sterrebaan 10
NL-3542 DK Utrecht
Phone +31 30 24 80 311
Fax +31 30 24 11 654

Endra B.V.
Voorste Groes 4
NL-5384 VJ Heesch
Phone +31 412 66 06 00
Fax +31 412 62 55 95

Austria

Strapex Austria Ges.mBH
Gewerbeparkstrasse 25
A-3500 Krems
Phone +43 2732 73 501
Fax +43 2732 74 960

Portugal

Strapex Embalagem, Lda.
Estrada da Outurela, 121
P-2794-051 Carnaxide
Phone +351 21 416 47 80
Fax +351 417 14 73

USA

Strapex USA
2601 Westinghouse Boulevard
US-Charlotte, North Carolina 28273
Phone +1 704-588-2510
Fax +1 704-588-8795

All other countries

Strapex GmbH
Nordstrasse 1
CH-5610 Wohlen (Switzerland)
Phone +41 56 619 83 00
Fax +41 56 619 81 06