



MOBISCREEN MS 16 Z



MOBILE SCREENING PLANTS



Mobile screening machine for recycling applications and processing of natural stones.

MOBISCREEN

Extremely rugged mobile screening machine for feeding capacities of up to 350 t/h. For processing natural stone as well as for recycling applications.

Feeding size up to max. 150 mm (6")

Plant in particular consisting of:

Feeding hopper 8 m³ with tilting slotted grate by means of remote control

Feeding belt conveyor 1200 mm wide 3500 mm long

Belt conveyor 1050 mm wide 9600 mm long

Double-deck vibration screen 1520 mm x 4270 mm lower deck: 3660 mm


Belt conveyor (oversize grain) 650 mm wide 9100 mm long discharge height 4600 mm

Belt conveyor (medium fractions) 650 mm wide 9100 mm long discharge height 4600 mm

Belt conveyor (fine fractions) 1200 mm wide 6300 mm long discharge height 3900 mm


Crawler chassis D 3

Diesel-Hydraulic drive CAT-Diesel engine 75 kW

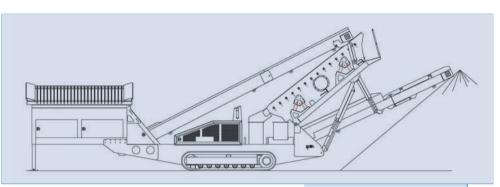

Working measurements:

length:	16400 mm
width:	15900 mm
height:	5600 mm





Transport measurements:

length:	15420 mm
width:	2900 mm
height:	3400 mm
weight:	ca. 27 t

As options are available:

Remote controlVibrating gridShredder

www.kleemann.info

©Kleemann GmbH